



FEATURES

- •100% full load burn-in test
- Universal AC input
- Small size and high efficiency
- •Conform to EMC EN5502 GB9254
- •Built-in EMI filter with tiny ripple
- $\bullet \mbox{Comply}$ with the safety standards UL60950 GB4943 EN60850
- Protection: short circuit/over Voltage/over/load temperature

MODEL		12V 200W	24V 200W
OUTPUT	DC VOLTAGE	12V	24V
	RATED CURRENT	16.6A	8.33A
	CURRENT RANGE	0~16.6A	0~8.33A
	RATED POWER	200W	200W
	RIPPLE& NOISE (MAX.)	150mVp-p	150mVp-p
	VOLTAGE TOLERANCE	±1%	±1%
	SETUP , RISE TIME	1000ms, 50ms/230VAC 1000ms,50ms/115VAC at full load	
	HOLD UP TIME(Typ.)	20ms/230VAC 16ms/115VAC at full load	
INPUT	VOLTAGE RANGE	85~132VAC/170~264VAC	
	FREQUENCY RANGE	47~63Hz	
	POWER FACTOR(Typ.)	PF>0.6/220VAC	
	EFFICIENCY(Typ.)	85%	85%
	AC CURRENT(Typ.)	4.5A/115VAC 2.5A/230VAC	
	INRUSH CURRENT(Typ.)	40A/115VAC 55A/230VAC	
	SHORT CIRCUIT	protection type: recovers automatically after fault condition is removed	
PROTECTION	OVER LOAD	105~135% hiccup mode , auto-recovery	
	DC ADJ. RANGE	115%~135% Cut off the output , auto-recovery	
ENVIRONMENT	WORKING TEMP	-20℃~ +60℃	
	WORKING HUMIDITY	20%~90%RH	
	STORAGE TEMP , HUMIDITY	-40°C~+85°C,10%~90%RH	
SAFETY&EMC	SAFETY STANDARDS	CE,ROHS	
	WITHSTAND VOLTAGE	I/P-O/P:1.5KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC	
	EMC TESTING STANDARD	EN55015:2006;EN61547:1995+A1:2000;EN61000-3-2:2006;	
		EN61000-3-3:1995+A2:2005;EN61347-1:2001;EN61347-2-13:2006	

Tel: 086 755 2306 0905

Fax: 086 755 2304 1269


Website: www.xinrealpower.com


Add: 5th Floor, B3 Building, Huafeng Shiji Industrial park, Hangcheng Road, Xixiang, Bao'an district, Shenzhen P.R.C.




Mechanical Specification

Terminal Assignment					
Pin No.	Assignment	Pin No.	Assignment		
1	AC/L	4.5.6	DC OUTPUT-V		
2	AC/N	7.8.9	DC OUTPUT+V		
3	≟ FG				
Dimension: 15	9*99*49 mm	Carton size: 430*278*227 mm			
Carton Quantity	: 50PCS/Carton	Weight: 0.52kg/PCS			





Product model: PS150W or PS200W

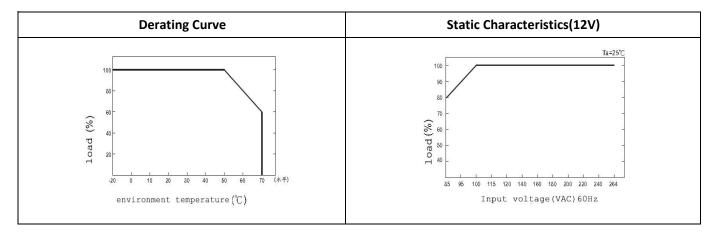

66

REMARKS:

1, The above mentioned data were measured at 230VAC input and 25°C.

2, Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.

3, Cut the AC input before checking any mal-phenomenons.

4, Make sure the INPUT&OUPUT were in right situation before connected to power supply.

5, Be ware of high power pressure may caused by short circut when installing metal casing products.

6, Please contact us at info@xinrealpower.com for further solution if any unforeable problem happens.

Tel: 086 755 2306 0905

Fax: 086 755 2304 1269

Website: www.xinrealpower.com

Add: 5th Floor, B3 Building, Huafeng Shiji Industrial park, Hangcheng Road, Xixiang, Bao'an district, Shenzhen P.R.C.