



**FEATURES**



- 100% full load burn-in test
- Universal AC input
- Small size and high efficiency
- Conform to EMC EN5502 GB9254
- Built-in EMI filter with tiny ripple
- Comply with the safety standards UL60950 GB4943 EN60850
- Protection: short circuit/over Voltage/over/load temperature

MODEL		12V 300W	24V 300W
OUTPUT	DC VOLTAGE	12V	24V
	RATED CURRENT	25A	12.5A
	CURRENT RANGE	0~25A	0~12.5A
	RATED POWER	300W	300W
	RIPPLE& NOISE (MAX.)	120mVp-p	150mVp-p
	VOLTAGE TOLERANCE	±1%	±1%
	SETUP , RISE TIME	1000ms, 50ms/230VAC 1000ms,50ms/115VAC at full load	
HOLD UP TIME(Typ.)	20ms/230VAC 16ms/115VAC at full load		
INPUT	VOLTAGE RANGE	85~132VAC/170~264VAC	
	FREQUENCY RANGE	47~63Hz	
	POWER FACTOR(Typ.)	PF>0.6/220VAC	
	EFFICIENCY(Typ.)	85%	86%
	AC CURRENT(Typ.)	4.5A/115VAC 2.5A/230VAC	
	INRUSH CURRENT(Typ.)	40A/115VAC 55A/230VAC	
SHORT CIRCUIT	protection type: recovers automatically after fault condition is removed		
PROTECTION	OVER LOAD	105~135% hiccup mode , auto-recovery	
	DC ADJ. RANGE	115%~135% Cut off the output , auto-recovery	
ENVIRONMENT	WORKING TEMP	-20°C ~ +60°C	
	WORKING HUMIDITY	20%~90%RH	
	STORAGE TEMP , HUMIDITY	-40°C ~+85°C ,10%~90%RH	
SAFETY&EMC	SAFETY STANDARDS	CE,ROHS	
	WITHSTAND VOLTAGE	I/P-O/P:1.5KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC	
	EMC TESTING STANDARD	EN55015:2006;EN61547:1995+A1:2000;EN61000-3-2:2006; EN61000-3-3:1995+A2:2005;EN61347-1:2001;EN61347-2-13:2006	


Mechanical Specification

Terminal Assignment

Pin No.	Assignment	Pin No.	Assignment
1	AC/L	3	DC OUTPUT-V
2	AC/N	4	DC OUTPUT+V
3	FG		
Dimension: 223*70*39 mm		Carton size: 430*278*227 mm	
Carton Quantity: 30PCS/Carton		Weight: 0.7Kg/PCS	

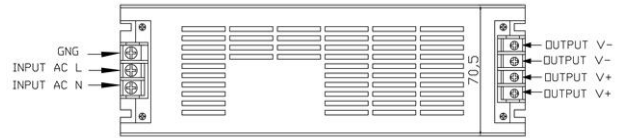

Product model: L250W

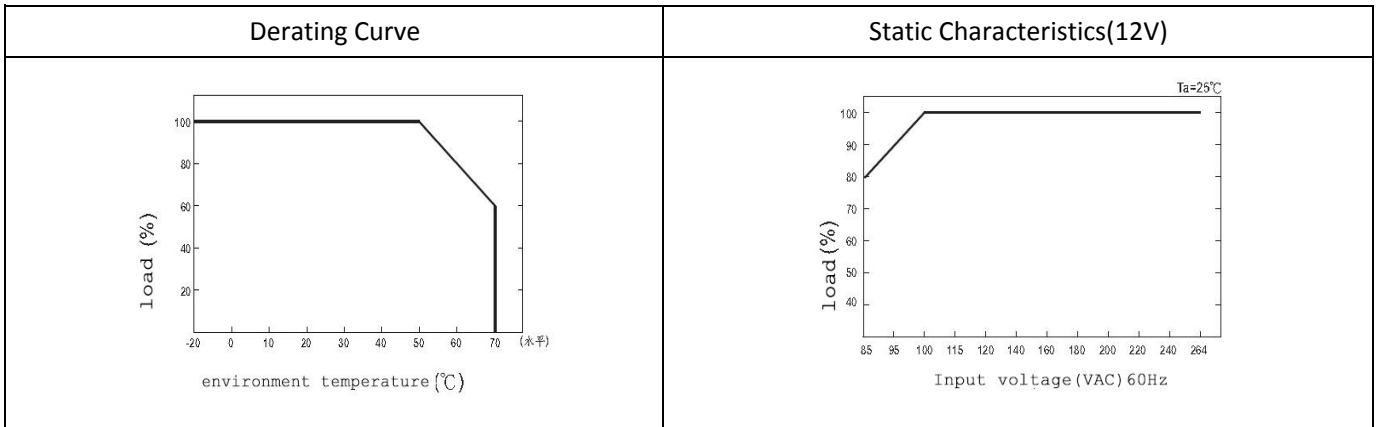

REMARKS:

- 1, The above mentioned data were measured at 230VAC input and 25°C.
- 2, Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
- 3, Cut the AC input before checking any mal-phenomenons.
- 4, Make sure the INPUT&OUPUT were in right situation before connected to power supply.
- 5, Be ware of high power pressure may caused by short circuit when installing metal casing products.
- 6, Please contact us at [info@xinrealpower.com](mailto:info@xinrealpower.com) for further solution if any unforeable problem happens.